


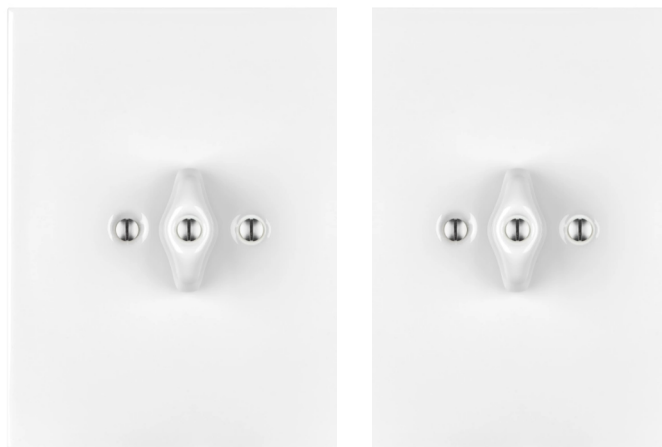


Porcelain switches - switch rotary


TABELLA-X

PRODUCT LIST

DIMENSIONS

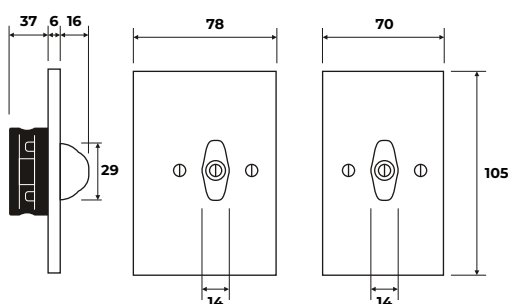

WIRING DIAGRAM

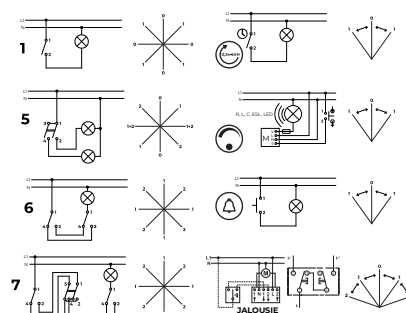

OPTIONS



bell



dimmer



timer

VOLTAGE

220 – 250 V AC, 16A, IP20
220 – 250 V AC, 3 poles, 16A
400 V AC, 3 poles, 16A
110 – 120 V AC, 16A, IP20



CERTIFICATE


MACHINE & WARRANTY

O3ZOR




Extended warranty:
for porcelain: 50 years
for el. machine: 10 years

COMPATIBILITY OF BOXES



GAP

for gap below the wall surface
use following reduction



COLORS (SURFACE)

Glossy
Matt

SCREWS



Stainless
Black
Silver
Brass
White

TIGHTENING TORQUE




Tightening torque
for porcelain **max** 0,1N



Tightening torque
for wirings **max** 1N



ASSEMBLY



FRAGILE



HANDLE WITH CARE

BLOCKED FOR TRANSPORT

Weight: 160g

